

# CAPSYLITE® G9 LAMPS



- 2000 hour average rated life
- UV Filter quartz
- Bright white, high quality halogen light
- 120 Volt operation
- Can be operated in open fixtures\*
- Available with either clear or frosted finish
- Snap-in G9 base

ECOLOGIC® is a comprehensive program of OSRAM SYLVANIA focused on addressing environmental issues at all stages of lamp life.



## **SYLVANIA CAPSYLITE® G9 lamps are the first line voltage halogen capsules that are suitable for use in unshielded fixtures.\***

The innovative CAPSYLITE G9 pinched quartz lamp structure eliminates arcing sources and creates a self-fusing lamp. It combines a bright, compact source with UV-Filter quartz, which means the CAPSYLITE G9 allows small, sleek fixtures to be designed without the need for expensive transformers and heavy glass shields.

The “G9” in CAPSYLITE G9 is the base designation. The new base is a simple snap in / pull out design that is perfect for getting lamps into and out of small fixtures.

The long life and energy efficiency of CAPSYLITE G9 lamps make them ideal for use in residential, commercial and industrial buildings.

Fixture design guide available on request.

## **Product Availability**

<b>Product</b>	<b>Finish</b>
25CAPSYLITE G9	Clear Frosted
40CAPSYLITE G9	Clear Frosted
60CAPSYLITE G9	Clear Frosted

## **Application Information**

### **Applications**

Small Aperture Down Lighting  
Residential and Commercial Applications  
Task Lighting

### **Application Notes**

1. Lamp may be used in open fixtures
2. No additional fusing is necessary
3. Lamp may be burned in any position
4. UV stop quartz glass for protection of light sensitive materials

\* SYLVANIA does not require lamp containment shielding. Consult most recent UL standards for luminaire requirements.



**Sample Specification**

Lamp shall be CAPSYLITE G9 halogen lamp with a 2000 hour average rated life. Lamp shall be energy efficient and pass TCLP to make the disposal of the used lamp easier for the end user.

**Ordering and Specification Information**

Item Number	Order Abbreviation	Finish	Watts	Avg. Rated Life (hrs.)*	Volts	Lumens*	LCL	MOL	Figure
57000	25CAPSYLITE/G9/CL	Clear	25	2000	120	255	1 1/16	2 2/5	2
57016	25CAPSYLITE/G9/CL/BL	Clear	25	2000	120	255	1	1 7/8	1
57001	25CAPSYLITE/G9/F	Frosted	25	2000	120	230	1 1/16	2 2/5	2
57015	25CAPSYLITE/G9/F/BL	Frosted	25	2000	120	230	1	1 7/8	1
57002	40CAPSYLITE/G9/CL	Clear	40	2000	120	510	1 1/16	2 2/5	2
57018	40CAPSYLITE/G9/CL/BL	Clear	40	2000	120	510	1	1 7/8	1
57003	40CAPSYLITE/G9/F	Frosted	40	2000	120	480	1 1/16	2 2/5	2
57017	40CAPSYLITE/G9/F/BL	Frosted	40	2000	120	480	1	1 7/8	1
57004	60CAPSYLITE/G9/CL	Clear	60	2000	120	830	1 1/16	2 2/5	2
57014	60CAPSYLITE/G9/CL/BL	Clear	60	2000	120	830	1 1/16	2 2/5	2
57005	60CAPSYLITE/G9/F	Frosted	60	2000	120	790	1 1/16	2 2/5	2
57019	60CAPSYLITE/G9/F/BL	Frosted	60	2000	120	790	1 1/16	2 2/5	2

**Ordering Guide**

40	CAPSYLITE	/	G9	/	CL	/	BL
Wattage: 40W	SYLVANIA CAPSYLITE Capsule		Base Type G9		Finish CL = Clear Finish F = Frosted		Packaging — = Carton BL = Blister Card

**Dimensions**




Figure	Diameter (D)	Light Center Length (H)	Maximum Overall Length (C)
1	9/16" (14mm)	1" (25mm)	1 7/8" (47mm)
2	9/16" (14mm)	1 1/16" (27mm)	2 2/5" (56mm)






Figure 1

Figure 2

**Spectral Power Distribution**

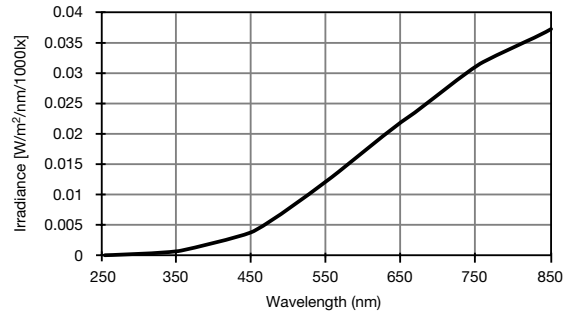

**Thermal Performance**



	Press Temperature	Pin Temperature
Maximum	370°C	250°C
25W	160°C	125°C
40W	190°C	145°C
60W	205°C	170°C

Thermal measurements were made in open air with a surrounding air temperature of 25°C. All measurements were made in a base up orientation operating at 120V. Values are provided for reference only

OSRAM SYLVANIA  
National Customer Support Center  
18725 N. Union Street  
Westfield, IN 46074

**Industrial & Commercial**  
Phone: 1-800-255-5042  
Fax: 1-800-255-5043

**National Accounts**  
Phone: 1-800-562-4671  
Fax: 1-800-562-4674

**OEM & Special Markets**  
Phone: 1-800-762-7191  
Fax: 1-800-762-7192

**Photo-Optic**  
Phone: 1-888-677-2627  
Fax: 1-800-762-7192

In Canada  
OSRAM SYLVANIA LTD.  
Headquarters  
2001 Drew Road  
Mississauga, ON L5S 1S4

**Industrial & Commercial**  
Phone: 1-800-263-2852  
Fax: 1-800-667-6772

**Special Markets**  
Phone: 1-800-265-2852  
Fax: 1-800-667-6772