



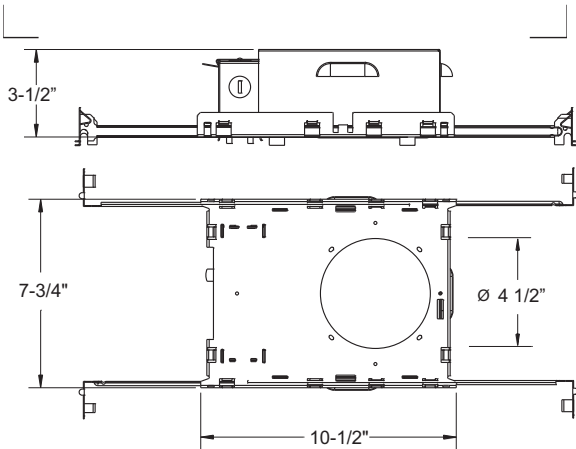

2-020-F MR16 - Non I/C Housing

SPECIFICATIONS

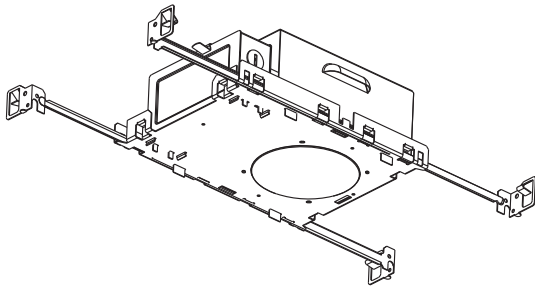

Housing:

- Rated Non I/C.
- Unique Design allowing installations of very shallow plenums as low as 4".
- Black powder coated 20ga. C.R.S. baseplate designed for bi-directional mounting of hanger bars.
- 16" Hanger bars supplied as standard
- Approved for all ceiling types including air-handling plenums.

J-box:

- 18ga galvanized steel
- 5 K.O. around j-box to allow for easy wire entry
- Approved for branch circuit wiring

Thermal Protection:

- All housings have overload protection for over lamping.

Transformer:

- Housings with Standard magnetic transformers are rated to MAX 50 Watts. Magnetic core and coil transformers are made with copper windings, Class H Rating (180°C): 120V, 277V, 347V Primary available.
- Optional Electronic transformer housings are available, MAX 50 Watts: 120V, 277V, Primary available only.
- Transformer is accessed through ceiling opening.

Socket:

- Low Voltage MR-16, 12V, (lamp by others).
- Porcelain Bi-Pin socket type GX5.3

Guarantee:

- 5 Year Warranty

ORDER GUIDE

| HOUSING | TRANSFORMER | VOLTAGE | OPTION |
|---------|----------------------|------------------|---|
| 2-020-F | E - Electronic XMR | 120 | BPHI - (Black Painted Housing Interior) |
| | Blank - Magnetic XMR | 277 | WPHI - (White Painted Housing Interior) |
| | | 347 ¹ | |

Note:
1) Standard magnetic transformer only available

Trims to be used with 2-020-F Frame-In Kit

| | |
|-----------------|---------------|
| Aqua | Lensed Picolo |
| Aurora | Picolo |
| Coral | Pin Hole |
| Conus | Pivot |
| Demi | Siris |
| Eclipse | Star Lite |
| Flare Wall Wash | Split |
| Key Hole | Sunburst |
| | Slice |

See individual specification sheets for trim details

DaSal Industries Ltd.
Unit #804-1515 Broadway Street
Port Coquitlam, BC V3C 6M2
Phone (604) 464-5644 Fax (604) 464-0888
www.dasalindustries.com

Data and specifications subject to change without notice

| | |
|------|--------------|
| Type | Project Name |
| | Order Number |

