



2-020-F-D/A

MR16 - Non I/C Housing (For Deep Aurora trims)

SPECIFICATIONS

Housing:

- Rated Non I/C.
- Unique Design allowing installations of very shallow plenums as low as 5".
- Black powder coated 20ga. C.R.S. baseplate designed for bi-directional mounting of hanger bars.
- 16" Hanger bars supplied as standard
- Approved for all ceiling types including air-handling plenums.

J-box:

- 18ga galvanized steel
- 5 K.O. around j-box to allow for easy wire entry
- Approved for branch circuit wiring

Thermal Protection:

- All housing have overload protection for over lamping.

Transformer:


- Housings with standard magnetic transformers are rated to MAX 50 Watts. Magnetic core and coil transformers are made with copper windings, Class H Rating (180°C): 120V, 277V, 347V Primary available.
- Optional Electronic transformer housings are available, MAX 50 Watts: 120V, 277V, Primary available only.
- Optional Q-TRAN toroidal magnetic transformer housings are available, MAX 50 Watts: 120V, 277V, Primary available only.
- Transformer is accessed through ceiling opening.

Socket:

- Low Voltage MR-16, 12V, (lamp by others).
- Porcelain Bi-Pin socket type GX5.3

Guarantee:

- 5 Year Warranty

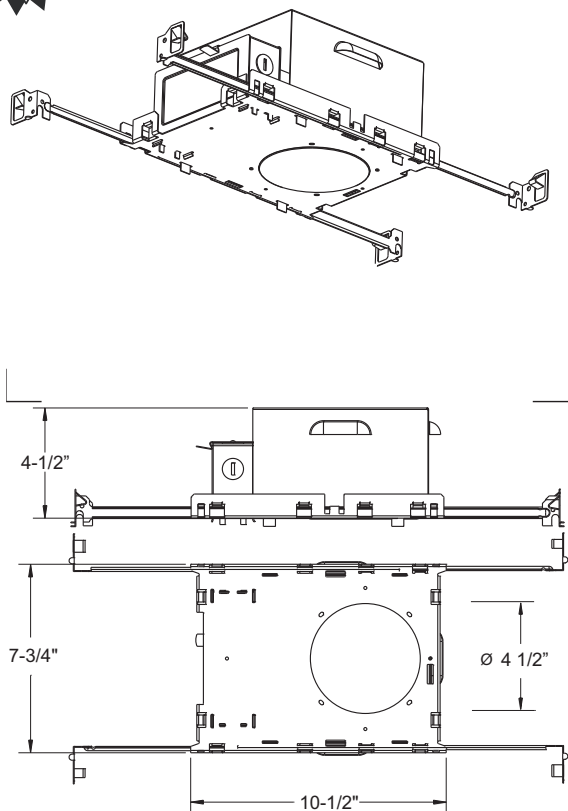

ORDER GUIDE

| HOUSING | TRANSFORMER | VOLTAGE | OPTION |
|-------------|-----------------------|---------|-----------------------------------------|
| 2-020-F-D/A | Blank - Magnetic XMR | 120 | BPHI - (Black Painted Housing Interior) |
| | E - Electronic XMR | 277 | WPHI - (White Painted Housing Interior) |
| | Q-TRAN - Magnetic XMR | 347' | |

Note:
1) Standard magnetic transformer only available

Trims to be used with 2-020-F-D/A Frame-In Kit

| | |
|-----------------|---------------|
| Aqua | Lensed Picolo |
| Aurora | Picolo |
| Coral | Pin Hole |
| Conus | Pivot |
| Deep Aurora | Siris |
| Demi | Star Lite |
| Eclipse | Split |
| Flare Wall Wash | Sunburst |
| Key Hole | Slice |

See individual specification sheets for trim details

DaSal Industries Ltd.
Unit #804-1515 Broadway Street
Port Coquitlam, BC V3C 6M2
Phone (604) 464-5644 Fax (604) 464-0888
www.dasalindustries.com

Data and specifications subject to change without notice

| | |
|------|--------------|
| Type | Project Name |
| | Order Number |

