


FLARE WALL WASH

MR-16 Trim

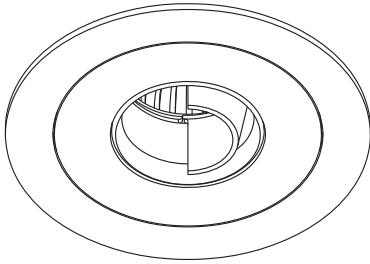


SPECIFICATIONS

The die cast aluminum Flare Wall Wash trim is designed with a strategically placed reflector and lens that optimizes uniform vertical illumination. It is ideal for wall wash or grazing applications.

- 2" trim aperture
- Black center offers excellent glare control
- Ideal spacing: 2 1/2ft on center with a 2ft set back from the wall
- Designed for non-cover glass MR16 lamp
- See Metal Halide Trim Spec Sheet For Metal Halide options.

Application: Ideal for washing walls in homes, retail, museums or any hospitality application.

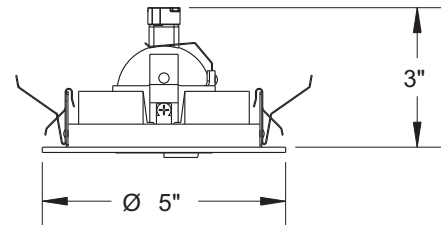

ORDER GUIDE

HOUSING	VOLTAGE	TRIM	FINISH
No Housing (Max 20 Watts) ¹	120	2-182 Flare Wall Wash	01 - White
2-010-I/C (Max 50W)	277		04 - Black
2-010-I/C-A/T (Max 50W)	347		05 - Matte Silver
2-010-I/C-Q-TRAN (Max 50W)			11 - Matte Nickel
2-010-I/C-A/T-Q-TRAN (Max 50W)			
2-012-I/C (MAX 50W)			
2-020-F (Max 50W)			
2-020-F-D/A (Max 50W)			
2-020-F-D/A-Q-TRAN (Max 50W)			
2-030-R (Max 50W)			
2-060-F (Max 75W)			
2-060-F-D/A(Max 75W)			
2-060-F-D/A-Q-TRAN (Max 75W)			
2-060-F-C/P (Max 75W)			
2-100-C/H (Max 75W)			

Note:
1) Trim Only indicates use with a remote Class 2 transformer. Transformer and R12S socket sold separately.
Hole Cut out size 4 1/2"

DaSal Industries Ltd.
Unit #804-1515 Broadway Street
Port Coquitlam, BC V3C 6M2
Phone (604) 464-5644 Fax (604) 464-0888
www.dasalindustries.com

Data and specifications subject to change without notice

Type	Project Name
	Order Number

